

X-LiteTM

Industrial Emergency Lighting
LED lamps
Outdoor – Non Metallic enclosure, IP65



REVISION HISTORY

REV NO.	DATE	NO. OF PAGES	PREPARED BY	REVIEWED BY	APPROVED BY
0	09.11.16	3	GSB	VR	AX

X-LiteTM

Industrial Emergency Lighting

LED lamps

Outdoor – Non Metallic enclosure, IP65



1. **APPLICATIONS:** Industrial Emergency Lightings designed with accuracy and longevity in mind. Our selections of emergency lighting products are designed for the toughest of environments and performing beautifully. The selection consists of models designed for indoor, wet-location, food processing and extreme temperatures. Corrosion resistant, rugged metal units featuring fully adjustable lighting heads and easy installation.


2. **FEATURES:**

- Outdoor wall mounting / surface mounting
- Rugged non-metallic polycarbonate enclosure IP65 RAL 7035
- Glare-free twin lighting heads
- Rotatable 180 degree bidirectional lamp heads
- LED lamps
- 7 AH, 12V SMF lead acid / Nickel Cadmium battery
- Fully automatic solid state charger
- Transformer isolation protection
- Input supply of 230V 50Hz / 120V 60Hz
- Fuse Protection
- Floating charger
- Test switch and LED indications
- Power consumption 15 watts during charging otherwise 5 watts only
- Power cord P+N+E of 1 meter length with IEC type D 3 pin plug.

3. PRODUCT SELECTIONS:

Model *	Back-up	Capacity	No. of lamps	A 'mm'	B 'mm'	C 'mm'	D 'mm'
RT-ENL-210-SLO	3 Hours	10 W	2	325	210	115	85
RT-ENL-120-SLO	3 Hours	20 W	1	-	-	180	140
RT-ENL-220-SLO	90 minutes	20 W	2	420	240	180	140

* Lamp type wattage, battery type shall be customised upon request.
 For Nickel cadmium, substitute 'N' instead of 'S'
 For 120V, 60Hz, suffix 120V to be added to the model number.

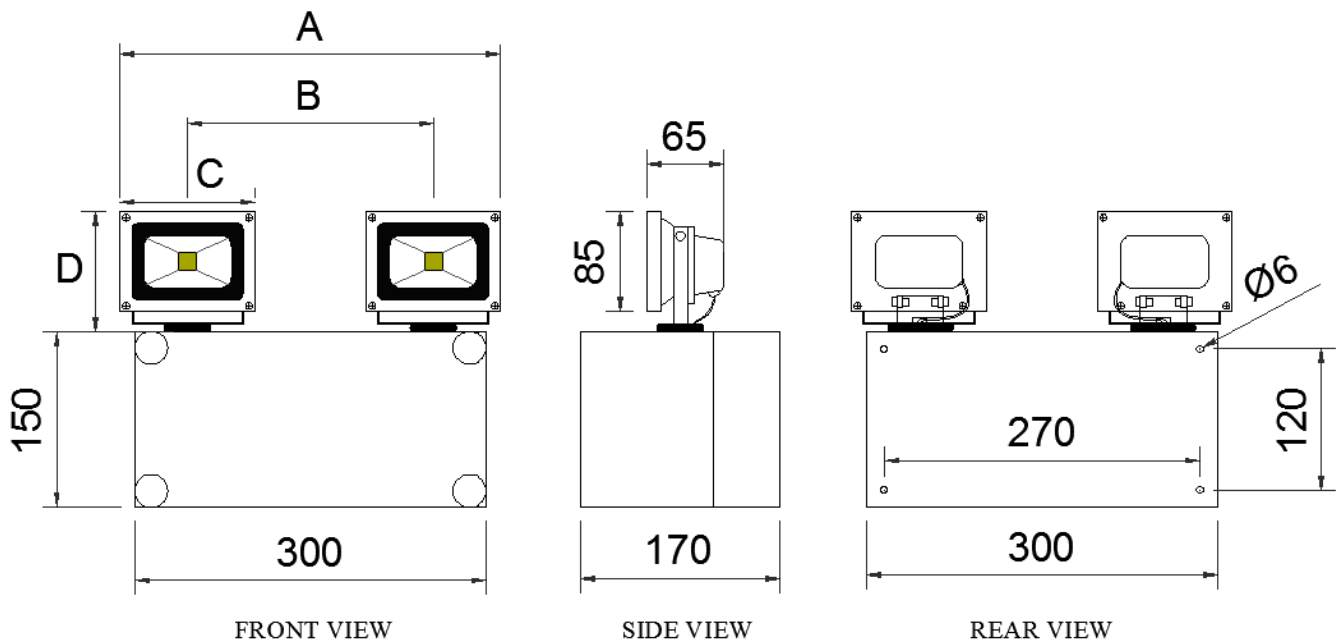

All Dimensions are in 'mm'

4. CALIBRATIONS:

This product is factory calibrated, No field calibration is necessary for the life of this product.

5. CERTIFICATIONS:

IP65, CE certified, RoHS compliant, ISO 9001:2008

6. WARRANTY

1 year carry-in warranty

Note: Please refer our product catalogue for other models selection.