

X-LiteTM

Exit / Signage Lighting
Acrylic



REVISION HISTORY

REV NO.	DATE	NO. OF PAGES	PREPARED BY	REVIEWED BY	APPROVED BY
0	09.11.16	4	GSB	VR	AX
1	11-12-19	4	SJC	FR	AX

X-Lite™

Exit / Signage Lighting
Acrylic



















1. APPLICATIONS:

Exit / Signage lightings are designed with accuracy and longevity in mind. Exit / Signage lightings are placed for guidance to people during fire emergency situation and carry operational information. It is widely used in factories, commercial places, restaurants, shopping malls, hospitals, airport etc. Our selections of Exit / Signage lightings are known for its high performance, durability and aesthetic finish.

2. FEATURES:

- Indoor Models
- Wall Mounting / Side Mounting / Ceiling mounting
- Powder coated rugged metal holder
- LED light source
- 1800 mAH Nickel-Metal Hydride (Ni-MH), 1.2V AA battery 8 nos for 6 hours power backup
- Selection of various signage codes
- Fully automatic solid state charger
- Input supply of 230V 50Hz / 120V 60Hz
- Power cord P+N+E of 1 meter length with IEC type D 3 pin plug.

3. PRODUCT SELECTIONS:

Model Without Backup	Model With Backup	Signage
RT-EXT-A0/-S01	RT-EXT-A1/-S01	
RT-EXT-A0/-S02	RT-EXT-A1/-S02	
RT-EXT-A0/-S03	RT-EXT-A1/-S03	
RT-EXT-A0/-S04	RT-EXT-A1/-S04	
RT-EXT-A0/-S05	RT-EXT-A1/-S05	
RT-EXT-A0/-S06	RT-EXT-A1/-S06	
RT-EXT-A0/-S07	RT-EXT-A1/-S07	
RT-EXT-A0/-S08	RT-EXT-A1/-S08	
RT-EXT-A0/-S09	RT-EXT-A1/-S09	
RT-EXT-A0/-S10	RT-EXT-A1/-S10	
RT-EXT-A0/-S11	RT-EXT-A1/-S11	
RT-EXT-A0/-S12	RT-EXT-A1/-S12	
RT-EXT-A0/-S13	RT-EXT-A1/-S13	
RT-EXT-A0/-S14	RT-EXT-A1/-S14	
RT-EXT-A0/-S15	RT-EXT-A1/-S15	
RT-EXT-A0/-SCZ	RT-EXT-A1/-SCZ	



Note:

CZ – customized

A0-without power backup, A1-with power backup

Backup duration – 6 hours (As per customer requirement)

4. INSTALLATION OPTIONS:

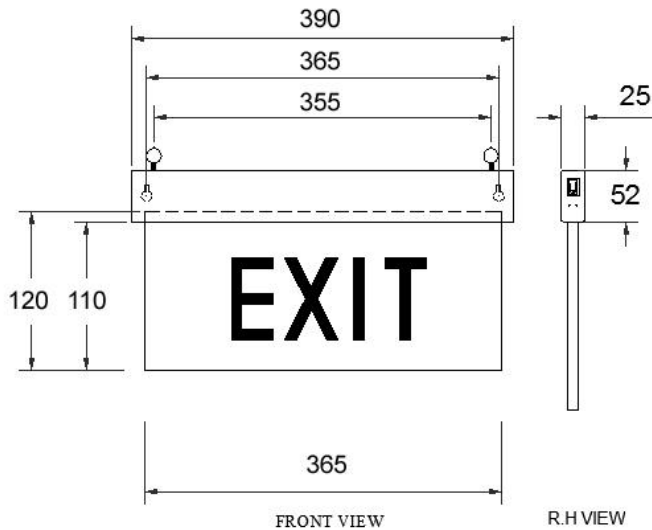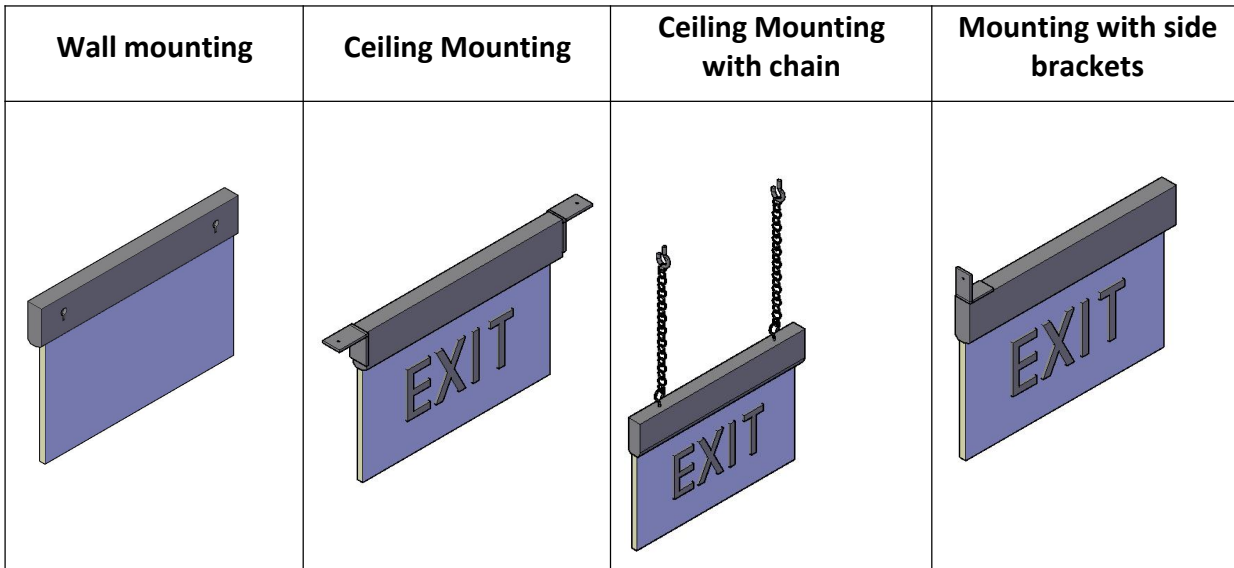

All Dimensions are in 'mm'

5. CALIBRATIONS:

This product is factory calibrated, No field calibration is necessary for the life of this product.

6. CERTIFICATIONS:

CE certified, ISO 9001:2015,

7. WARRANTY

1 year carry-in warranty

Note: Please refer our product catalogue for other models selection.